
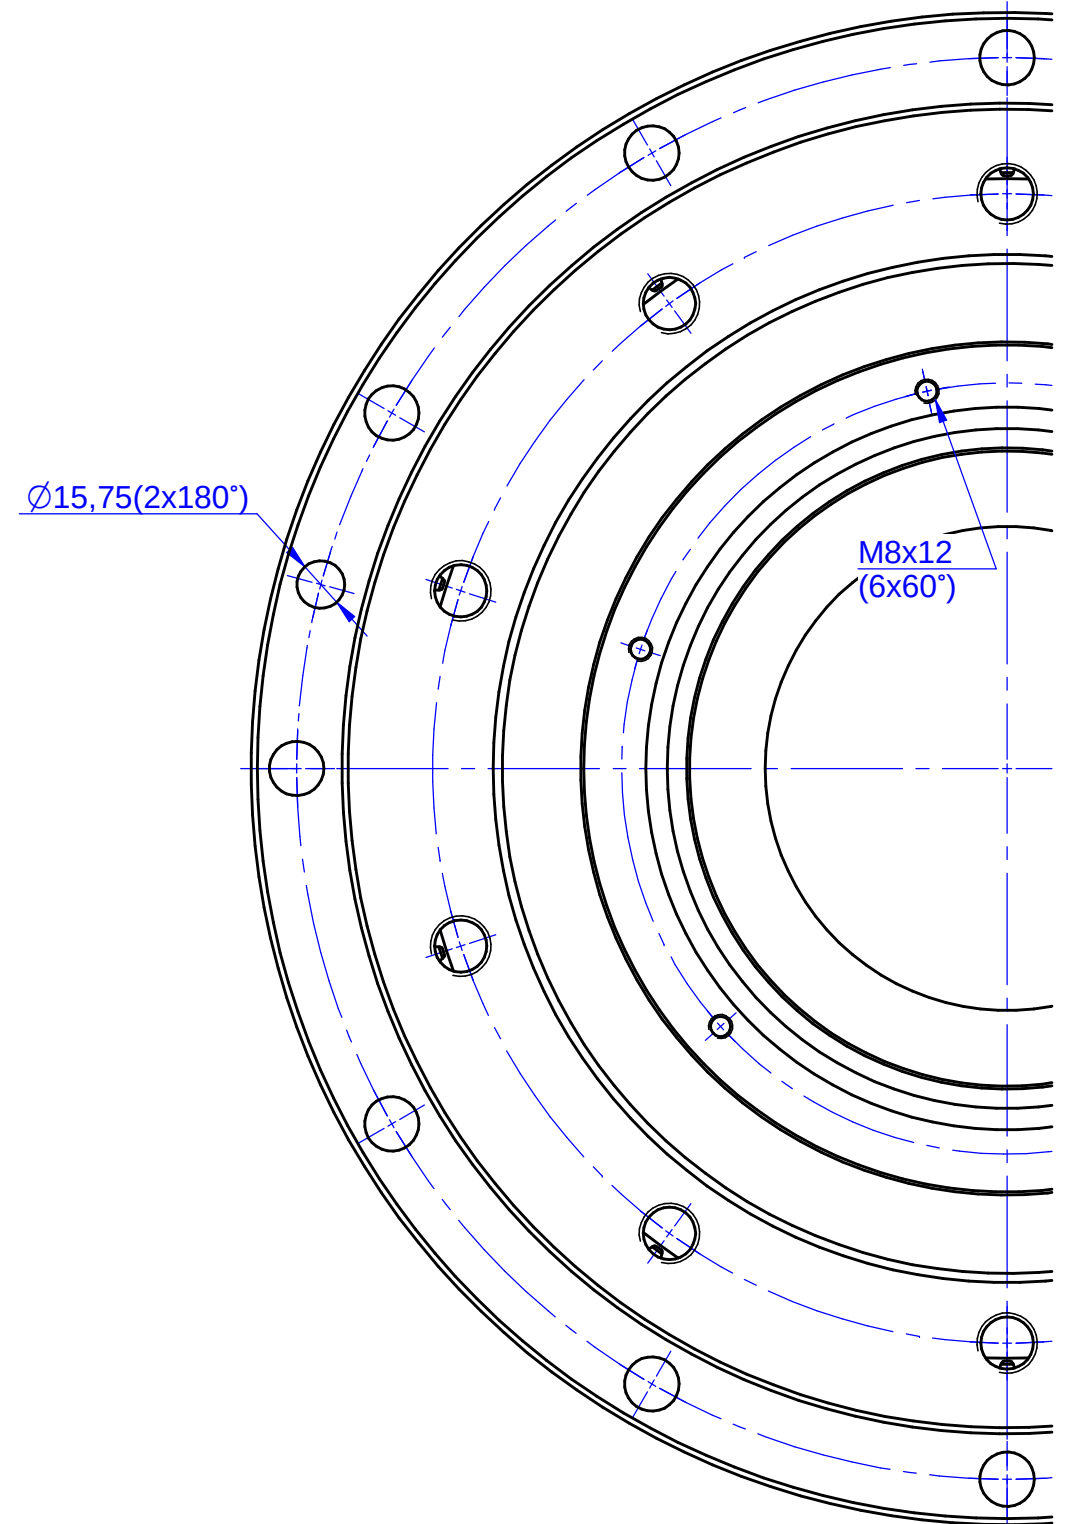
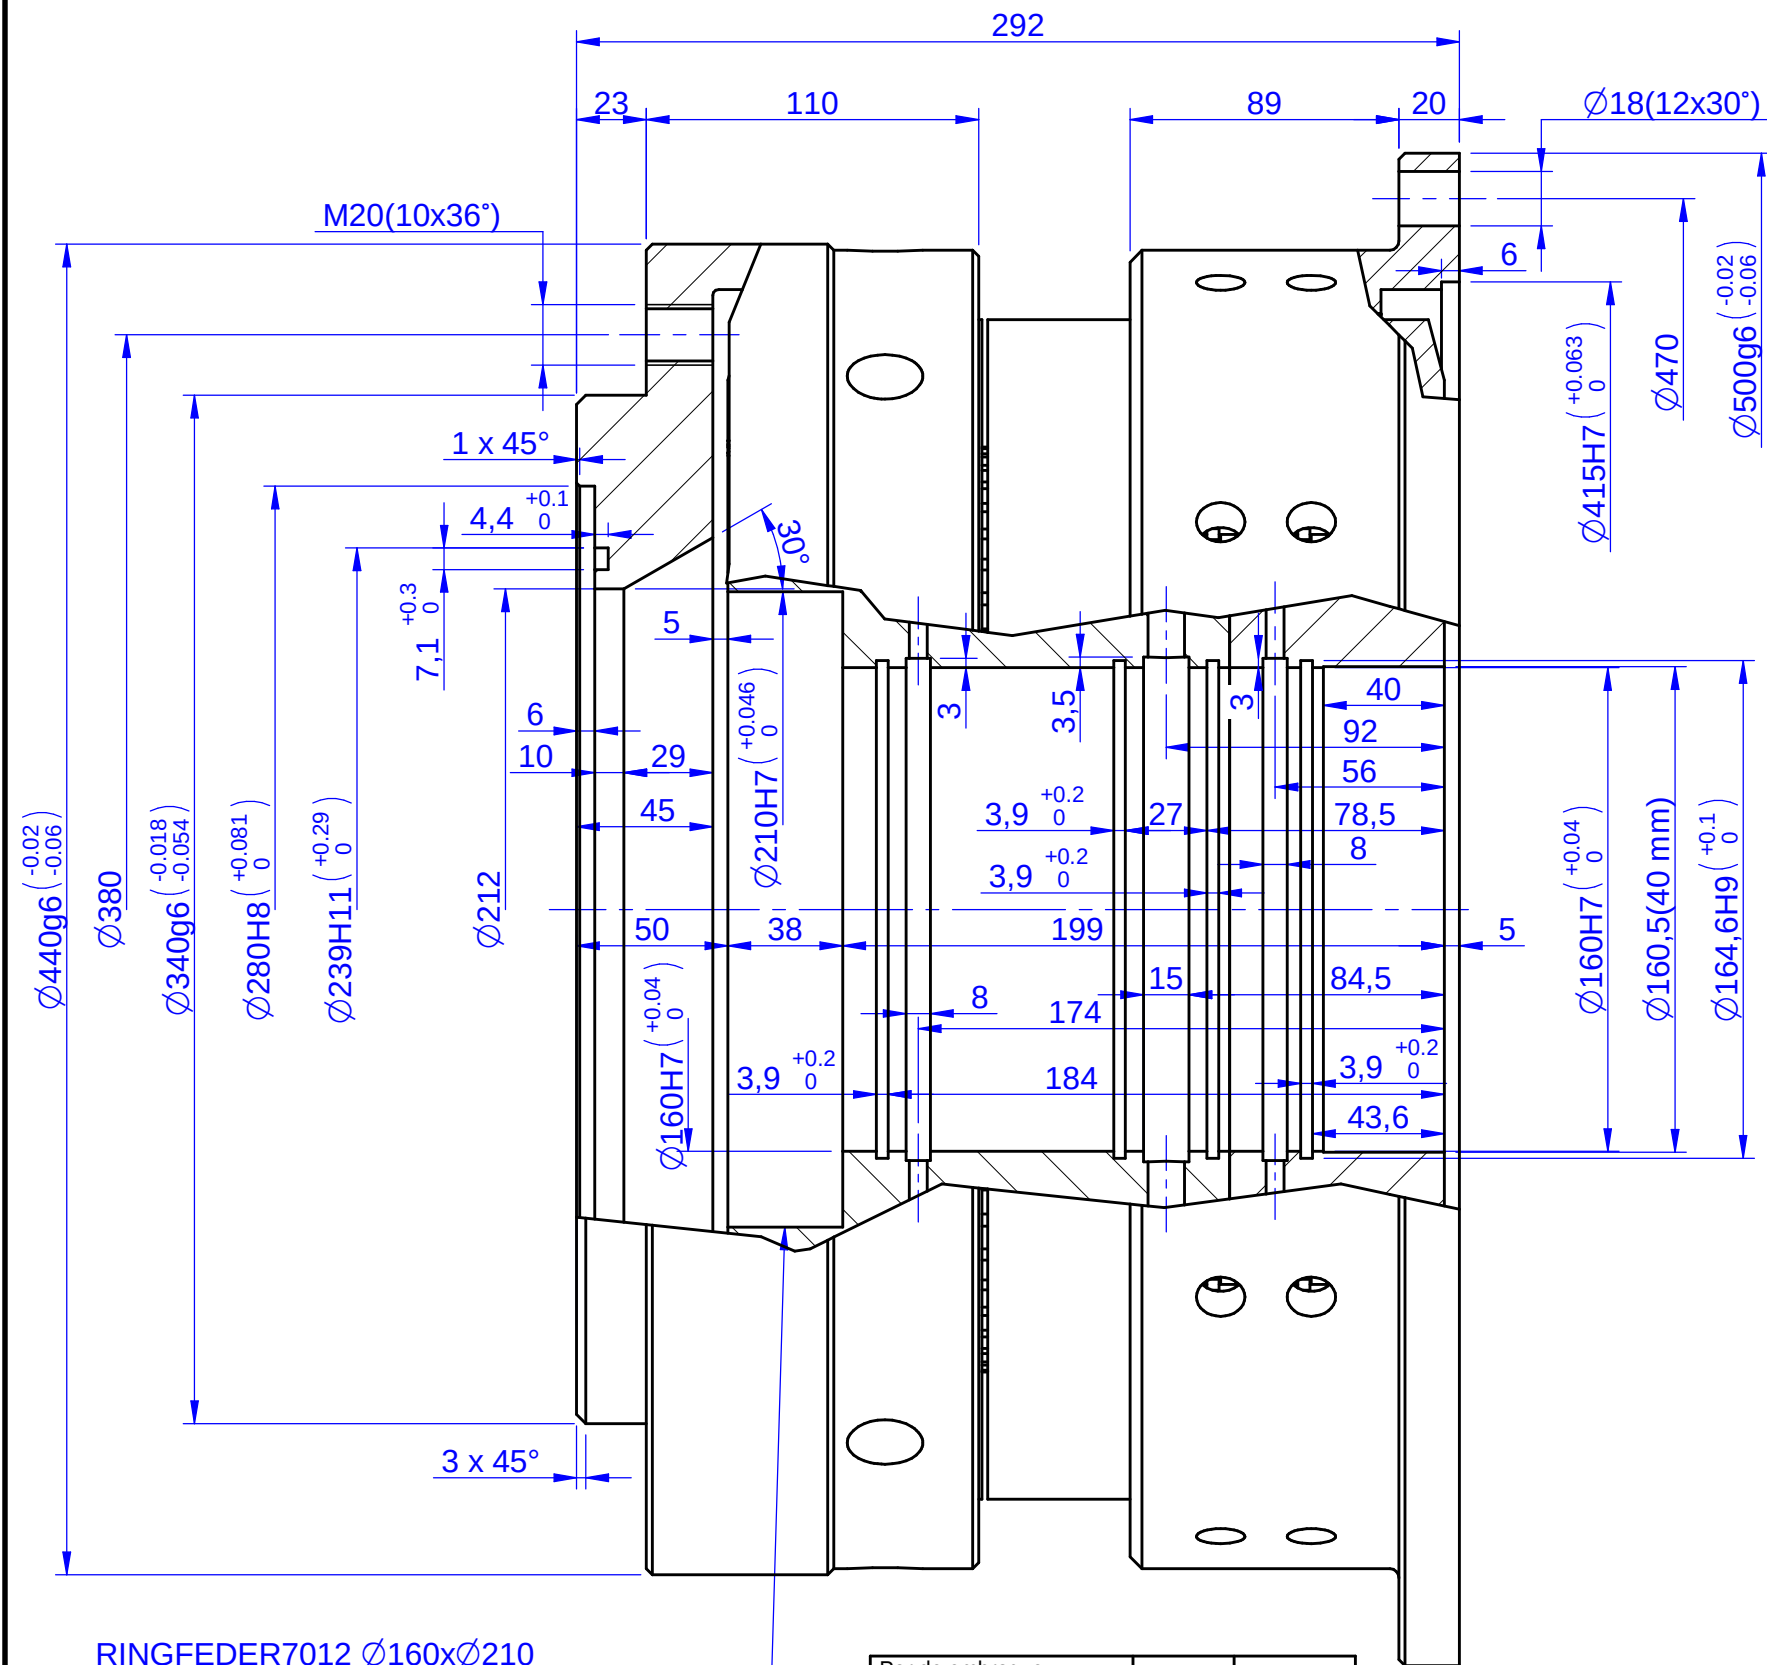




RINGFEDER7012 Ø160xØ210
SCREWS TIGHTENING TORQUE= 145 Nm
TRANSMISSIBLE TORQUE= 32.480 Nm

Par de embrague CLUTCH TORQUE(s)	Nm	28000
Par de freno BRAKE TORQUE(d)	Nm	14500
Presion de trabajo OPERATING PRESSURE	Bar	70
Velocidad max. MAX. SPEED	Rpm	850
J INTER.	Kgm ²	2,94
Embolada STROKE VOLUME	dm ³	0,049
Recorrido piston PISTON TRAVEL	mm	2 ±0,1
Presión resortes princip. MAIN SPRINGS PRESSURE	Bar	27,8-31

DENOMINACIÓN Name				MATERIAL Material		TRATAMIENTO Treatment		PESO Weight	
		MODIFICACIÓN Change			FECHA Date	NOMBRE Name		FIRMA Signature	DATA Date
MEDIDAS SIN TOLERANCIA Measures without tolerance DIN ISO 2768 - mK							DIBUJADO Drawn	A.U.E.	31/01/2013
							APROBADO Approved	J.M.I.	2013-01-31
MEDIDA Measure	TOLERANCIA Tolerance						PLANO Nº. Drawing No.		OFE13005
0,5 ≤ 3	± 0,1						ESCALA Scale		1:2.5
> 3 ≤ 6	± 0,1								
> 6 ≤ 30	± 0,2								
> 30 ≤ 120	± 0,3								
> 120 ≤ 400	± 0,5								
> 400 ≤ 1000	± 0,8								
FRENO EMBRAGUE HIDRAULICO HYDRAULIC CLUTCH BRAKE						GOIZPER			